

# No Sound Series

# 1370

NS

## Certified for:


- Sound insulation  
**57 dB**
- Fire resistance:  
**60 min.**
- Insulation from smoke  
**1,08 m³ / h / m - 25 Pa**
- Usage cycles  
**200.000 cycles**

## Protects from:

- Air
- Water
- Light
- Insects



Not an obstacle for disabled persons

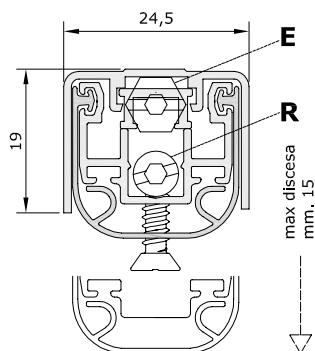

## STANDARD ACCESSORIES



Standard measurements (mm)	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	100	100	100	100	100	100	100	100	100


## FASTENING SYSTEMS

### STANDARD



With pre-mounted screws

## MAIN APPLICATIONS

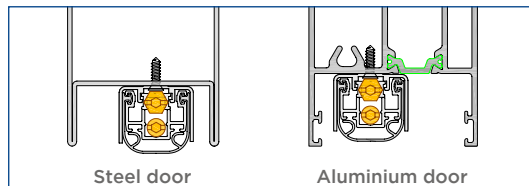

• **FEATURES** Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

• **COMPONENTS** Extruded profiles in aluminium alloy 6060 - high performance wrap-around silicone gasket - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7 mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel - self-drilling 3.5 x 25 mm screws.

## • VARIATIONS ON REQUEST

**Button:** round nylon, square nylon, bevelled nylon.

**Gasket:** dual high performance silicone lamellar (art. AE p.40).

### STANDARD PACKAGING

Cardboard box with 25 pcs + 25 standard accessory packs

### OPTIONAL PACKAGING

Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions

## OPTIONAL ACCESSORIES

### Nylon plate



CODE	PROFILE
CA201	Deceuninck M.
CA202	Deceuninck Z.
CA203	VE-KA
CA204	Kommerling.
CA205	Schöco CT70
CA207	Winsol


**Colour:**  
brown, white

**Packaging:**  
100 pcs pack

CA202  
on frame with ribbing



### Insulating nylon plate with silicon gasket

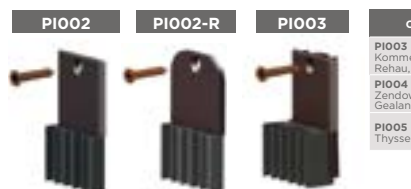

CODE
PI003
Kommerling, Rehau, Winsol
PI004
Zendow, Gealan, Schöco
PI005
Thyssen

**Colour:**  
brown, white

**Packaging:**  
20 pcs pack

PI002  
on frame with ribbing

